


bouchon électrosoudable

tapón electrofusión

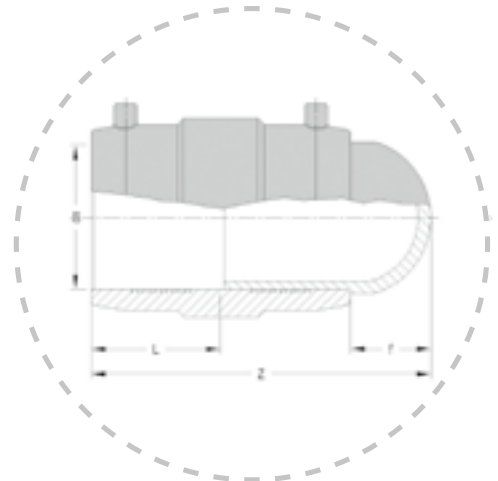


cod. 21.36 PE 100

diam. d _n	SOUDABILITÉ sur tube/raccord SOLDABILIDAD en el tubo/accesorio									
	SDR 26 - S 12,5		SDR 17 - S 8		SDR 11 - S 5		SDR 9 - S 4		SDR 7,4 - S 3,2	
	PE 80	PE 100	PE 80	PE 100	PE 80	PE 100	PE 80	PE 100	PE 80	PE 100
20					● ▲	● ▲	● ▲	● ▲	●	●
25					● ▲	● ▲	●	●	●	●
32			● ▲	● ▲	●	●	●	●	●	●
40			● ▲	● ▲	●	●	●	●	●	●
50			● ▲	● ▲	●	●	●	●	●	●
63			●	●	●	●	●	●	●	●
75			●	●	●	●	●	●	●	●
90			●	●	●	●	●	●	●	●
110			●	●	●	●	●	●	●	●
125			●	●	●	●	●	●	●	●
140			●	●	●	●	●	●	●	●
160	●	●	●	●	●	●	●	●	●	●

● soudable seulement avec soudeuses monovalentes Serie Euro
soldable solo con máquinas monovalentes Serie Euro

▲ épaisseur minimale soudable 3 mm
espesor mínimo para soldar 3 mm

d _n	dimension - <i>dimensión</i>			poids - <i>peso</i>	
	f	L	Z	PE 100	
				PN 16 - S5	PN 25 - S5
20	26	33	100	60	60
25	30	33	104	70	75
32	22	38	98	92	100
40	24	44	114	135	155
50	24	49	127	195	250
63	26	54	136	310	360
75	44	44	164	410	550
90	34	70	164	630	850
110	47	68	187	990	1400
125	47	76	198	1405	1800
140	45	85	207	1870	2400
160	40	92	211	2405	3300



ABSOLUMENT
obligatoire le raclage
du tubes

ABSOLUTAMENTE
obligatoria
la raspadura
de tubos

soudabilité
garantie sur tubes
en PE80 et PE100

soldabilidad
garantizada para
tubería PE 80
y PE 100



raccords
électro-
soudables
accesorios
electro-
soldables