
PVC-U Solvent welded metric fittings

PVC-U Raccordi per incollaggio metrici

TEE 90° REDUCED
TI 90° RIDOTTO

Rev. Jun 2020

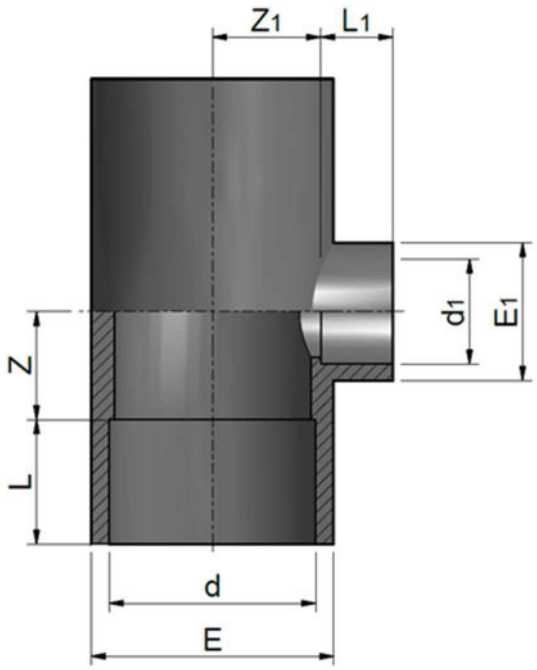

Code	d	d1	L	L1	Z	Z1	E	E1	PN	Weight (g)
RDRTRD020A	20	16	16	14	11	11	28	23	16	25
RDRTRD025A	25	16	19	16	14	14	33	24	16	40
RDRTRD025B	25	20	19	16	14	14	34	28	16	42
RDRTRD032A	32	16	22	14	17	17	42	24	16	68
RDRTRD032B	32	20	23	16	18	18	42	28	16	69
RDRTRD032C	32	25	23	19	18	18	42	34	16	70
RDRTRD040B	40	20	27	16	21	21	50	28	16	105
RDRTRD040C	40	25	26	19	21	21	51	34	16	107
RDRTRD040D	40	32	27	22	21	21	50	42	16	112
RDRTRD050B	50	20	31	16	26	26	61	28	16	165
RDRTRD050C	50	25	31	19	26	26	61	34	16	157
RDRTRD050D	50	32	31	22	26	26	61	42	16	162
RDRTRD050E	50	40	31	26	26	26	61	51	16	168
RDRTRD063B	63	20	38	16	33	33	75	25	16	278
RDRTRD063C	63	25	38	19	33	33	75	34	16	282
RDRTRD063D	63	32	38	22	33	33	74	42	16	275
RDRTRD063E	63	40	38	26	33	33	74	51	16	277
RDRTRD063F	63	50	38	31	33	33	74	60	16	296
RDRTRD075D	75	32	44	22	39	39	89	42	16	453
RDRTRD075E	75	40	45	26	39	39	90	51	16	465
RDRTRD075F	75	50	45	31	39	39	90	61	16	465
RDRTRD075G	75	63	45	38	39	39	90	74	16	478
RDRTRD090E	90	40	51	26	47	47	106	51	16	714
RDRTRD090F	90	50	51	31	47	47	106	61	16	703

Code	d	d1	L	L1	Z	Z1	E	E1	PN	Weight (g)
RDRTRD090G	90	63	51	39	47	47	106	75	16	713
RDRTRD090H	90	75	51	43	47	47	106	90	16	730
RDRTRD110F	110	50	61	31	57	57	129	61	16	1250
RDRTRD110G	110	63	61	34	56	56	130	75	16	1318
RDRTRD110H	110	75	61	44	56	56	130	90	16	1260
RDRTRD110I	110	90	61	51	56	56	130	106	16	1295
RDRTRD125G	125	63	69	44	66	66	148	75	16	1660
RDRTRD125H	125	75	69	44	66	66	148	89	16	1700
RDRTRD125I	125	90	74	52	64	64	145	106	16	1750
RDRTRD125L	125	110	74	63	64	64	145	130	16	1830
RDRTRD140H	140	75	76	44	72	72	163	89	16	2267
RDRTRD140I	140	90	76	51	72	72	163	106	16	2490
RDRTRD140L	140	110	76	61	72	72	163	129	16	2560
RDRTRD140M	140	125	76	69	72	72	163	148	16	2590
RDRTRD160I	160	90	89	51	81	81	187	106	16	3750
RDRTRD160L	160	110	89	61	81	81	187	130	16	3800
RDRTRD160M	160	125	86	69	82	82	184	148	16	3890
RDRTRD160N	160	140	86	76	82	82	184	163	16	3940
RDRTRD180L	180	110	96	62	94	93	209	135	10	5550
RDRTRD200I	200	90	106	52	58	102	225	112	10	5200
RDRTRD200L	200	110	106	63	58	113	228	137	10	5200
RDRTRD200O	200	160	106	87	87	103	228	185	10	6200
RDRTRD225L	225	110	119,5	63	58	114	258	135	10	6600
RDRTRD225O	225	160	119,5	88	84	115	258	193	10	8300
RDRTRD250L	250	110	133	63	58	128	284	134	10	8300
RDRTRD250O	250	160	131	87	86	129	284	189	10	9900
RDRTRD250Q	250	200	131	106	133	132	284	228	10	12100
RDRTRD280O	280	160	146	88	84	153	320	193	10	12500
RDRTRD280R	280	225	146	117,5	117	148,5	320	258	10	15200
RDRTRD315I	315	90	164	51	62	158	355	112	10	14300
RDRTRD315L	315	110	164	62	62	158	355	135	8	14350
RDRTRD315O	315	160	164	86	83	161	355	193	8	15150
RDRTRD315Q	315	200	164	106	105	158	355	228	8	16600
RDRTRD315R	315	225	164	118,5	128	162	355	259	8	17500
RDRTRD315S	315	250	164	131	127	160	355	285	8	19300
RDRTRD400L	400	110	206	61	55	200	438	134	8	17800
RDRTRD400U	400	315	206	165	280	302	434	352	4	38700

All descriptions and illustrations in this publication are intended for guidance only and shall not constitute a 'sale by description'. All dimensions given are nominal, while changes can be done on the information, products and specifications from time to time for a variety of reasons, without prior notice. The information in this publication is provided 'as is' on the revision date stated on the sheet. Updates will not be issued automatically. This information is not intended to have any legal effect, whether by way of advice, representation or warranty (express or implied). We accept no liability whatsoever (to the extent permitted by law) if you place any reliance on this publication you must do so at your own risk. All rights reserved. Copyright in this publication belongs to Polypipe Italia and all such copyright may not be used, sold, copied or reproduced in whole or part in any manner in any media to any person without prior consent. EFFAST is a registered trademark."