



XIAMEN SANIDENG PLASTICS INDUSTRY CO.,LTD


Add.: Factories #27-28, Si Ming Park, Tong An Industrial Zone, Tong An District, Xiamen, 361100, Fujian, China

Tel: 86-592-7197129 Fax: 86-592-7197120 Web: www.sanking.cn

UPVC & CPVC Pipe (DIN)

SPECIFICATIONS:

Size	D	Tolerance	T(min)	Tolerance	pressure
DN15	20	+0.2	2.3	+0.4	-
DN20	25	+0.2	2.8	+0.5	-
DN25	32	+0.2	3.6	+0.5	-
DN32	40	+0.2	3	+0.5	S6.3
DN40	50	+0.2	3.7	+0.6	S6.3
DN50	63	+0.3	4.7	+0.7	S6.3
DN65	75	+0.3	5.6	+0.8	S6.3
DN80	90	+0.3	6.7	+0.9	S6.3
DN100	110	+0.4	8.1	+1.1	S6.3
DN125	140	+0.5	10.3	+1.3	S6.3
DN150	160	+0.5	11.8	+1.4	S6.3
DN180	200	+0.6	14.7	+1.7	S6.3
DN200	225	+0.7	16.6	+1.9	S6.3
DN250	250	+0.8	18.4	+2.3	S6.3
DN300	315	+1.0	23.2	+2.6	S6.3
DN350	355	+1.1	26.1	+2.9	S6.3

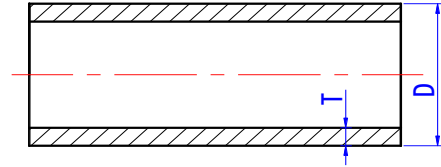

DESCRIPTION:

- 1) Material: UPVC, CPVC
- 2) Size: DN15 - DN350 ; 20mm - 355mm
- 3) Standard: DIN PN16
- 4) Operating temperature : UPVC(0 ~ 55°C); CPVC(0 ~95°C)
- 5) Typical applications : industrial, sewage, water treatment, drain etc.

Note : Do not recommend to service or test with compressed air or gases.

CHARACTER:

- ★ UPVC Pipe
 - Light weight and cost effective
 - Low friction loss & thermal conductivity
 - Good electrical, acid and alkali resistance
 - Guaranteed quality & life-span

- ★ CPVC Pipe
 - Low smoke generation
 - Low friction loss & thermal conductivity
 - Outstanding fire performance characteristics
 - Excellent chemical resistance & mechanical strength
 - Guaranteed quality & life-span